NASA Langley's

Fabrication of Fiber-Metal Laminates with Non-Autoclave Processes

VARTM-based technique enables larger, less expensive hybrid laminate parts

A new technique developed by NASA enables the preparation of metal/composite hybrid laminates, also known as fiber-metal laminates (FML), through a one-step processing method. Currently FMLs are prepared by a compression process using a press or autoclave with metallic layers sandwiched between layers of glass or graphite prepreg (preimpregnated fibers with a matrix resin). NASA's process essentially eliminates the need to produce prepreg prior to the production of a hybrid laminate. It also allows the production of large, net shape structures that were previously not possible with autoclave or press technologies due to size constraints. Essentially, it involves an infusion process whereby matrix resin transversely infiltrates fiber layers that have been sandwiched between plies of metal foil containing flow pathways to produce a metal/composite hybrid laminate. The infiltration can be accomplished using pressure (resin transfer molding [RTM]), or a vacuum induced pressure differential (vacuum assisted resin transfer molding [VARTM]).

Benefits

- Part sizes can be larger than those possible from autoclave or press processing
- Eliminates the need for complex tooling (as needed in autoclave or press processing) and thus is less expensive
- Produces high quality, low void content hybrid laminates with high fiber volumes without need for previously prepared prepreg
- Requires no autoclaves or presses
- Can be used to produce curved laminate structures and complex shapes

partnership opportunity

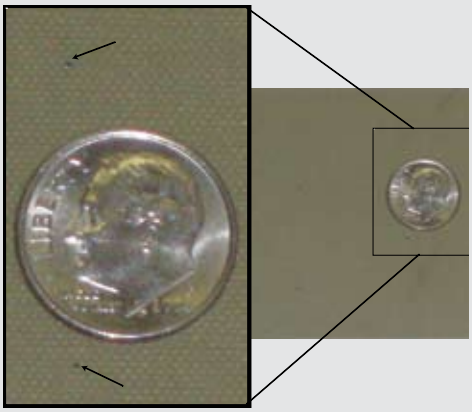

Figure 1: Hybrid metal foil laminate fabricated by a VARTM process showing the relative size of flow pathways in the metal foils. Resin flow pathways shown are approximately 0.016 inches in diameter.

Applications

The technology offers wide-ranging market applications, including:

- Aeronautics and aerospace structures – e.g., fuselage, floors, liners, cargo containers
- Pressure vessels and storage tanks
- Automotive structures
- Ballistic protection – explosives, bomb containment

The Technology

The FMLs resulting from the NASA process have similar properties to traditionally produced metal/composite hybrid laminates including, as compared to either the composite or metal only structures, improved load carrying capability, lighter weight, improved stiffness, improved impact resistance and damage tolerance, and improved permeation resistance. The NASA process can be applied to various FML types, including GLARE (glass, aluminum, epoxy), and TIGR (titanium, graphite). Typical manufacturing processes are costly and complex shapes are hard to produce, whereby the NASA process enables use of these kinds of laminates without an autoclave or press, thus increasing the size that can be produced and decreasing the cost.

The resin pathways in the foils enable connection between the plies that can improve the interlaminar strength of the final part. Functionally the NASA process creates resin columns in the transverse direction of the plies. NASA is working to optimize the final properties by varying the size and distribution of the pathways.

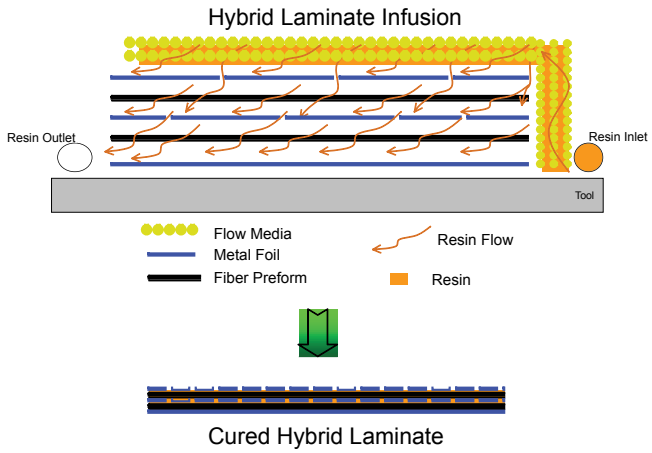

Figure 2: Schematic of the hybrid metal foil laminate infiltration process where resin flows both in-plane through the fabric layers and transversely through the flow pathways of the metal foils

For More Information

If your company is interested in licensing or joint development opportunities associated with this technology, or if you would like additional information on partnering with NASA, please contact:

The Technology Gateway

National Aeronautics and Space Administration

Langley Research Center
Mail Stop 218
Hampton, VA 23681
757.864.1178
LARC-DL-technologygateway@mail.nasa.gov
technologygateway.nasa.gov

www.nasa.gov

LAR-17165

Vol 1, Issue 16
NP-2008-04-77-LaRC